




PP8266 RIGGER BOOTS

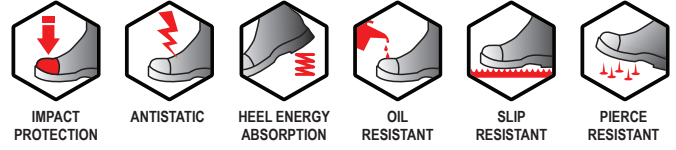

KEY FEATURES

- SRC S3 CATEGORY
- Certified to EN ISO 20345: 2011
- 200 Joules Impact Protection Toe-cap
- 15kN Compression Resistance
- Anti-static Outsole
- Goodyear Welted Construction

SPECIFICATION

Upper:	Full-Grain Leather
Vamp Lining:	Non-woven White (270 GSM)
Toe-cap:	Steel toe-cap
Thread:	Nylon 6 Ply
Welt:	PVC Welt
Midsole:	PU+Steel Antiperporation Mid-plate
Outsole:	Rubber Sole (Heat resistance 300°C) Slip-Resistant, Oil and Fuel Resistant Anti-static
Insole:	Texon sheet
Insocks:	PU footed with 6mm(t) at heel area, 3mm at the foot area

SIZES

39- 46

PACKING

1Pr / Box - 5 Box / Carton

APPLICATIONS

- Oil & Gas
- Drilling
- Refinery
- Construction
- Logistics
- Glass Plants
- Metal Fabrication
- Assembly Works
- Demolition
- General Maintenance

